


MOLDED POLY COVER

9700 TEM 2

www.lawlervalve.com

**DATA SHEET**

ENG. NO. 82373-E

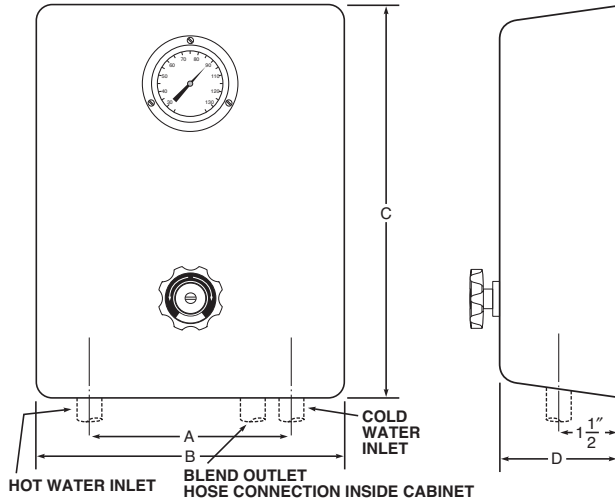

# Lawler Temflow 9700 TEM 2 For Photographic & X-Ray Developing

The Lawler Temflow 9700 TEM 2 is equipped with Lawler's Series 9700 double stage mixing valve with union end stop and check valves with removable strainers on each inlet, a vacuum breaker, dial thermometer, and  $\frac{3}{4}$ " hose connection on the blended water outlet. The unit comes assembled with a durable molded poly enclosure for easy wall mounting.


parts of stainless steel and actuated by a liquid-filled thermostat, all contained in one compact body. The mixing valve shall be adjustable between all cold and 105°F temperatures unless otherwise specified.

Includes thermometer.

The mixing valve shall be combination pressure-balanced and thermostatically-controlled with sliding

CAPACITY G.P.M. AT 45. P.S.I.	PIPE SIZE		ORDER NUMBER	A	B	C	D	E
	INLET	OUTLET						
$\frac{1}{2}$ to $2\frac{1}{2}$	$\frac{1}{2}$ "	$\frac{1}{2}$ "	TEM2-9700-A <input type="checkbox"/>	8"	12"	15"	$4\frac{1}{16}$ "	$1\frac{1}{2}$ "
1 to 4	$\frac{1}{2}$ "	$\frac{1}{2}$ "	TEM2-9700-B <input type="checkbox"/>	8"	12"	15"	$4\frac{1}{16}$ "	$1\frac{1}{2}$ "
4 to 7	$\frac{1}{2}$ "	$\frac{1}{2}$ "	TEM2-9700-C <input type="checkbox"/>	8"	12"	15"	$4\frac{1}{16}$ "	$1\frac{1}{2}$ "

FLOW CAPACITIES - SERIES 9700

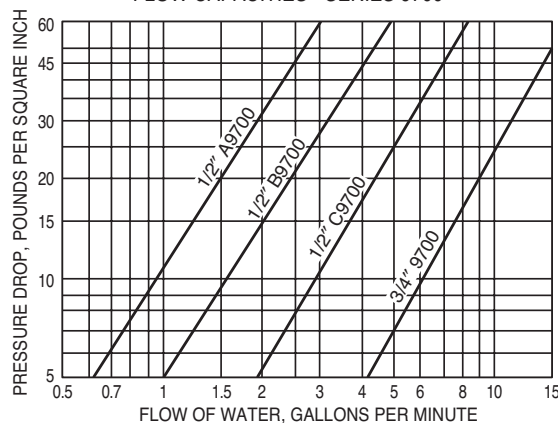

**MANUFACTURING CO., INC.**

5330 East 25th Street  
Indianapolis, Indiana 46218  
Phone (317) 261-1212  
Fax (317) 261-1208

Design and specification subject to change without notice.