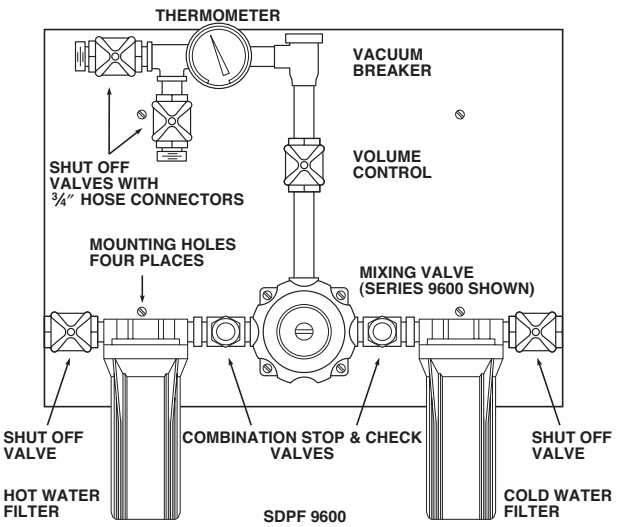

www.lawlervalve.com **DATA SHEET**

ENG. NO. 82380F

Lawler Temflow 9600 Dual Filter Water Management Systems

Panel dimensions: 24″H by 24″W.
Filters not to exceed 10″ from bottom of panel.

The Lawler Temflow dual filter system is equipped with Lawler series 9600 single stage mixing valve with combination stop and check valves, a poly or stainless steel filter with shut-off valve on hot and cold supplies. The blended water outlet includes a volume control, a vacuum breaker, dial thermometer, and two convenient $^3/_4$″ hose connectors with shut-off valves. It is furnished completely assembled with your choice of finish and securely mounted on an attractive, easy to clean panel.

MIXING VALVE

SERIES 9600 – The mixing valve shall be thermostatically-controlled with sliding parts of stainless steel and actuated by a liquid-filled thermostat, all contained in one compact body. The mixing valve shall be adjustable between all cold and 105°F temperatures unless otherwise specified.

MIXING VALVE 9600

- ☐ $^1/_2$ - $2^1/_2$ GPM
- ☐ 1 - 5 GPM
- ☐ 5 - 10 GPM

FILTER:

- ☐ Stainless Steel
- ☐ Poly

FINISH:

- ☐ Polished Hard Chrome
- ☐ Natural Rough Brass

FLOW CAPACITIES - SERIES 9200 & 9600

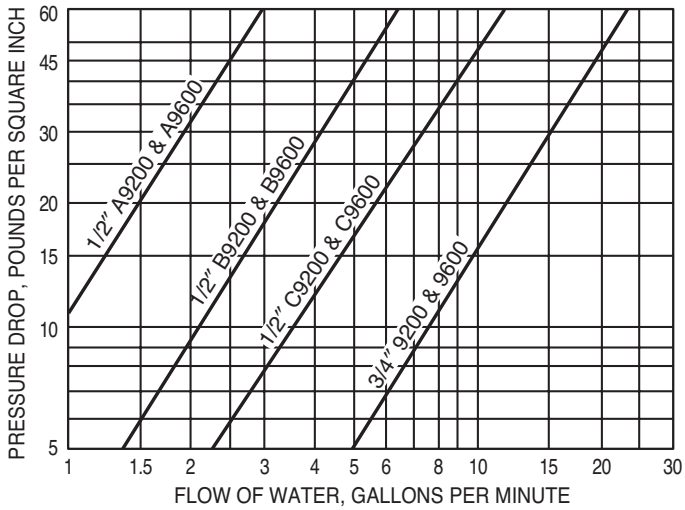

LAWLER
MANUFACTURING CO., INC.
5330 East 25th Street
Indianapolis, Indiana 46218
Phone (317) 261-1212
Fax (317) 261-1208

Design and specification subject to change without notice.

DATAPHOTO